



Ref.: 8000-0002

QW-1SHU

single shutter switch

Description

Single shutter switch with touch panel equipped with high in-rush current relays. The movement direction may be easily inverted in the Device Edit menu. The Open and Close times must be measured for position calculation with the *Measure* button on the Device Edit menu. The shutter may be controlled by up to 28 different buttons.

Accessories

One of the following touch panel glasses:
 8000-0023 QP-SINGLE-W
 8000-0024 QP-EDGE-W
 8000-0025 QP-MIDDLE-W

Electrical characteristics



Power supply: 230 V 50 Hz
 Consumption: 0.5 W
 Maximum current: 10 A ($\cos \phi = 1$)
 In-rush current 500 A, 2 ms

Certifications

CE
 IEC 60669-2-1
 Low voltage directive 2014/35/EU
 EMC directive 2014/30/EU

Dimensions

A = 27 mm
 B = 39 mm
 C = 53 mm
 D = 71 mm
 E = 53 mm
 F = 54 mm

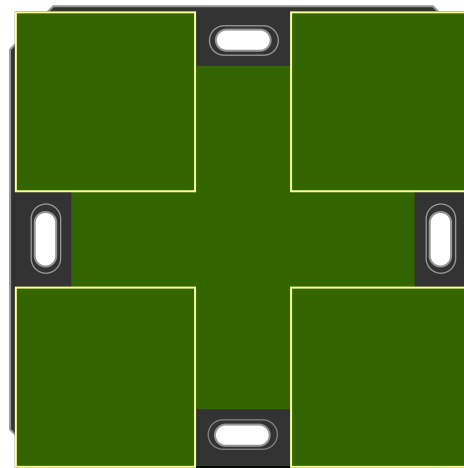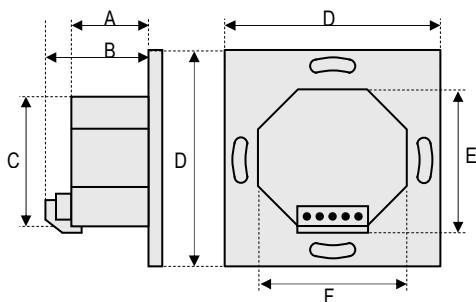

Connection diagram:

